

THE Z80 INSTRUCTION SET

EX DE, HL Exchange the HL and DE registers.


Function: DE \longleftrightarrow HL

Format:

1	1	1	0	1	0	1	1
---	---	---	---	---	---	---	---

 EB

Description: The contents of the register pairs DE and HL are exchanged.

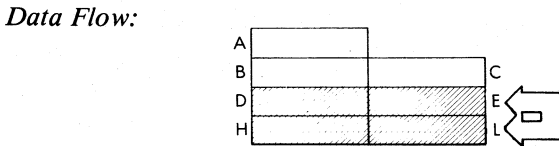

Timing: 1 M cycle; 4 T states; 2 usec @ 2 MHz

Addressing Mode: Implicit.

Flags:


S	Z		H	P/V	N	C

 (no effect).

Example: EX DE, HL

Before:

After:



OBJECT CODE

