



PROGRAMMING THE Z80

DEC IX Decrement IX.


Function: $IX \leftarrow IX - 1$

Format:



Description: The contents of the IX register are decremented and the result is stored back in IX.


Data Flow:

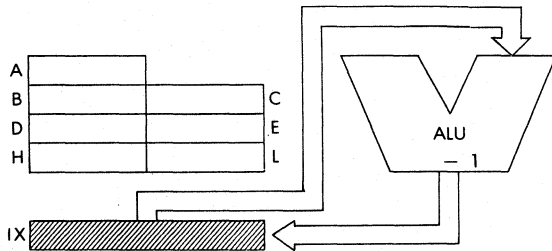

Timing: 2 M cycles; 10 T states; 5 usec @ 2 MHz

Addressing Modes: Implicit.



Flags:



Example: DEC IX

Before:

After:



OBJECT CODE